


U-TP5000C 수하물 태그 프린터 Baggage Tag Printer




BT




kpc
KAB-QC-04

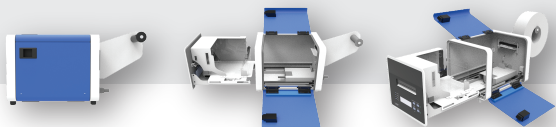

U-TP5000C [BT]

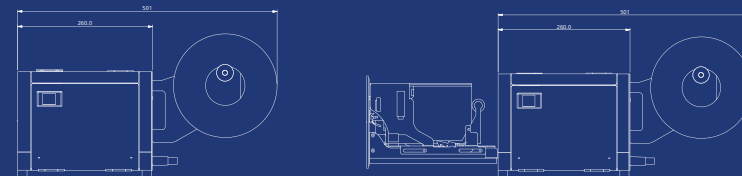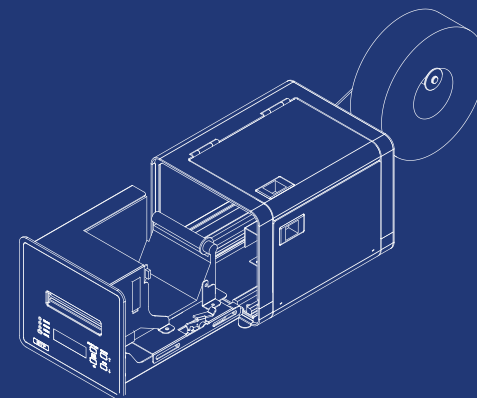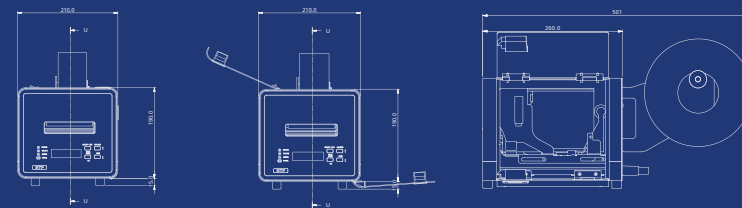


■ 제품 구성품



urielsoft

수하물 태그 프린터 (Baggage Tag Printer)

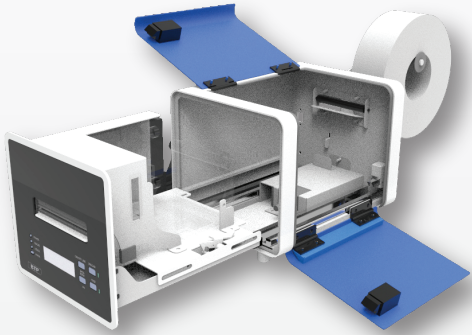

U-TP5000C BT는 감열 Line Dot 방식을 적용하여 고속인자가 가능한 Line Thermal Unit 프린터입니다. 체크인 카운터에서 차지하는 공간을 줄이기 위해 부피를 최소화한 소형 프린터로, 이동이 용이하며 공간의 효율성 향상 및 발권 대기 시간을 획기적으로 줄인 장비입니다.

공항 내 카운터 업무의
효율화 및 경제적인 가격

신형 플랫폼과의
완벽한 연동 서비스
지원 환경 제공

사용자 편의성에 충실한
새로운 업무 환경 조성

우수한 품질을 바탕으로
유지보수 비용 절감

U-TP5000C [BT]

PRINT METHOD	Direct line thermal	
SUPPORTED COMMANDS	AEA2009	
CERTIFICATION	CUPPS TS (Compatible)	
PRINT FONT	Alphanumeric characters	95 characters
	Extended graphics	128 × 30 pages
RESOLUTION	International characters	16 sets
	203dpi	
IATA Res.	740, 740a	
RELIABILITY-CONSUMABLES	100,000 tags	
CHARACTER STRUCTURES	Template	Arbitrary width (cpi)
PRINT SPEED	Selectable: 150mm (5.9inch)/sec, 200mm (7.8inch)/sec, 250mm (9.8inch)/sec	
BARCODE	Interleaved 2 of 5, Industrial 2 of 5, Code 39, Code 128, EAN 13	
TWO-DIMENSIONAL SYMBOL	PDF417, QR code, Aztec, Datamatrix	
INTERFACES	USB	
AUTO CUTTER	Full cut (scissor-type with separated blades)	
PAPER	Width	54 ± 0.5mm
	Length	440 to 600mm
	Thickness	220µm or less (including backing paper)
ROLL PAPER DIMENSIONS	Diameter 184.2mm maximum (76.2mm inside core)	
POWER CONSUMPTION	Stand-by power	Below 3W
	Baggage tag	Mean approx. 35W
OPERATING TEMPERATURE	5 to 45°C (storage -25 to 50°C)	
RELIABILITY - PRINTER	Printer life (excluding printer mechanism, print head and auto-cutter)	5 years or 100km
	MTBF	360,000 hours
	MCBF	70 million lines
OVERALL DIMENSIONS	210 (W) × 441 (D) × 205 (H)mm	
WEIGHT Approx.	Approx.10kg	

urielsoft | 주)우리엘소프트

서울시 강서구 양천로 401, 강서한강자이타워 B동 1105호

Tel. 02.2638.5733 Fax. 02.2638.5734 E-mail. master@urielsoft.co.kr www.urielsoft.co.kr